

Product Description

Satellite Mobility (LCPA) Agreement



Product Description

Satellite Mobility (LCPA) Agreement

Version	Description	Effective Date
2.0	First issued version of Satellite Mobility (LCPA) Agreement 2	Start Date

Copyright

This document is subject to copyright and must not be used except as permitted below or under the Copyright Act 1968 (Cth). You must not reproduce or publish this document in whole or in part for commercial gain without the prior written consent of **nbn**. You may reproduce and publish this document in whole or in part for educational or non-commercial purposes as approved by **nbn** in writing.

Copyright © 2024 nbn co limited. All rights reserved. Not for general distribution.

Disclaimer

This document is provided for information purposes only. The recipient must not use this document other than with the consent of **nbn** and must make its own inquiries as to the currency, accuracy and completeness of this document and the information contained in it. The contents of this document should not be relied upon as representing **nbn**'s final position on the subject matter of this document, except where stated otherwise. Any requirements of **nbn** or views expressed by **nbn** in this document may change as a consequence of **nbn** finalising formal technical specifications, or legislative and regulatory developments.

Environment

nbn asks that you consider the environment before printing this document.

Introduction

This Product Description describes the **nbn**[®] Satellite Mobility Product. It forms part of the Product Module for the **nbn**[®] Satellite Mobility Product.

Roadmap

A roadmap describing the structure of the Product Description for the **nbn**[®] Satellite Mobility Product follows for the assistance of Customer.

Part A: The **nbn**[®] Satellite Mobility Product

Part A describes the **nbn**[®] Satellite Mobility Product.

Part A: The nbn [®] Satellite Mobility Product	Page
The nbn [®] Satellite Mobility Product	4

Part B: Required Product Components

Part B describes the four core Product Components of the **nbn**[®] Satellite Mobility Product which Customer must order.

Part B: Required Product Components	Page
1 Mobility Network-Network Interface (M-NNI)	5
2 Mobility Fleet Virtual Circuit (MF-VC)	5
3 Mobility Beams Virtual Circuit (MB-VC)	6
4 Mobility Beams Interface (MBI)	6

Part C: General conditions of supply

Part D sets out general conditions which apply to the supply of **nbn**[®] Satellite Mobility Product to Customer.

Part C: General conditions of supply	Page
5 Conditions of Use	8
7 Interconnection and network supply chain	8
8 Satellite Network architecture and the Satellite Mobility Product boundaries	10
10 Speeds, performance and availability	11

Part A: The **nbn**® Satellite Mobility Product

The **nbn**® Satellite Mobility Product:

- is a network connection on the Satellite Network between:
 - (i) the Mobility Network-Network Interface (M-NNI) at the POI; and
 - (ii) the Mobility Beams Interface (MBI);
- enables Customer or its Downstream Customers to supply a network connection to a Listed Mobile Terminal installed on a Supported Commercial Passenger Aircraft; and
- comprises four Product Components that Customer must acquire as part of the **nbn**® Satellite Mobility Product:

Type	Product Component
Product Components	M-NNI; MF-VC; MB-VC; MBI

Part B: Required Product Components

Section 1 describes the M-NNI. Customer must order a single M-NNI. Customer connects its network to the Satellite Network at the POI where the M-NNI is located.

1. Mobility Network-Network Interface (M-NNI)

1.1 M-NNI description

- (a) A **Mobility Network-Network Interface** or **M-NNI** is the interface at the POI where Customer traffic is handed over to the Satellite Network.
- (b) The M-NNI is the point of handover for all MF-VCs associated with that M-NNI.
- (c) The **M-NNI Bearer** is the physical interface between the Customer Network and the Satellite Network.
- (d) An M-NNI supplied in respect of the **nbn**[®] Satellite Mobility Product will not be made available in respect of the supply of other products and services offered by **nbn**.

1.2 M-NNI Bearer

- (a) The physical interface options for the M-NNI Bearer are as follows:

M-NNI Bearer profile
1000BaseLX
10GBaseLR
10GBaseER

- (b) Each M-NNI Bearer must be configured with either a logical single or diverse chassis redundancy mode.
- (c) If Customer selects single chassis as the redundancy mode for an M-NNI, the M-NNI will operate as a single, unprotected interface.
- (d) Each M-NNI Bearer where Customer selects diverse chassis as the redundancy mode will be connected across a pair of chassis.

Section 2 describes the MF-VC. Customer may order the MF-VC in any of the bandwidth profiles set out in section 2.2.

2. Mobility Fleet Virtual Circuit (MF-VC)

2.1 MF-VC description

- (a) A **Mobility Fleet Virtual Circuit** or **MF-VC** is network capacity on the Satellite Network used to carry Customer traffic between one or more associated MB-VCs, on an aggregated basis, and the M-NNI associated with the MF-VC.
- (b) Subject to section 2.1(c), Customer may order an MF-VC in any of the bandwidth profiles set out in section 2.2.

- (c) Customer must not order, and **nbn** may decline an order for, MF-VC bandwidth profiles that will result in ordered CIR capacity of the MF-VC exceeding 1500 Mbps at the M-NNI.

2.2 MF-VC Bandwidth Profiles

- (a) Customer must select one or more bandwidth profiles for an MF-VC.
- (b) The available MF-VC bandwidth profiles are:

MF-VC bandwidth profile	Symmetrical Mbps (CIR)
MF-VC25	25 Mbps to 1500 Mbps (in increments of 25 Mbps)
MF-VC100	100 Mbps to 1500 Mbps (in increments of 100 Mbps)

- (c) As described in sections 9 and 10, the CIR applies at the M-NNI only. The actual data throughput experienced may be significantly less than the total CIR of ordered MF-VC bandwidth profiles.

Section 3 describes the Mobility Beams Virtual Circuit (MB-VC). Customer must order one MB-VC for each MF-VC.

3. Mobility Beams Virtual Circuit (MB-VC)

3.1 MB-VC description

- (a) The **Mobility Beams Virtual Circuit (MB-VC)** is a virtual connection on the Satellite Network used to carry Customer traffic between the Mobility Beams Interface and the MF-VC associated with that MB-VC.
- (b) For each MF-VC it orders, Customer must order at least one MB-VC.
- (c) Customer must order access to an MB-VC for each Listed Mobile Terminal associated with that MB-VC.
- (d) A Listed Mobile Terminal can only be associated with one MB-VC.
- (e) An MB-VC can be associated with multiple Listed Mobile Terminals.
- (f) An MB-VC will use dynamic routing to determine the Mobility Beam(s) in which a Listed Mobile Terminal is located at a point in time, and to direct relevant Customer traffic to and from that Mobility Beam(s) for that Listed Mobile Terminal (up to and from the Mobility Beams Interface).

Section 4 describes the Mobility Beams Interface (MBI).

4. Mobility Beams Interface (MBI)

4.1 MBI description

- (a) The **Mobility Beams Interface (MBI)** is the air interface located at the outer surface of the Satellite-based Facility where Customer traffic for all Mobility Beams is handed over from the Satellite Network to the Customer Network.
- (b) **nbn** will supply a single MBI for all MB-VCs ordered by Customer.
- (c) Customer may access the **nbn**® Satellite Mobility Product at the MBI using a Listed Mobile Terminal which is:

- (i) located within the Coverage Area of a Mobility Beam; and
- (ii) operated by Customer in accordance with this Agreement.

Part C: General conditions of supply

Sections 5, 6 and 7 set out some general obligations of **nbn** and Customer which apply in relation to the end-to-end supply of services to which **nbn**[®] Satellite Mobility Product is an input.

5. Conditions of Use

Customer must not, and must ensure that any Downstream Service Provider does not, supply a Customer Product or Downstream Product that relies on **nbn**[®] Satellite Mobility Product as an input unless it is to a Listed Mobile Terminal installed on a Supported Commercial Passenger Aircraft accordance with the [Operations Manual](#).


6. Mobile Terminals

- (a) A Mobile Terminal used by Customer to access the **nbn**[®] Satellite Mobility Product at the MBI constitutes part of the Customer Network.
- (b) Customer must not use a Mobile Terminal to access, and **nbn** is not required to enable access to, the **nbn**[®] Satellite Mobility Product at the MBI unless the Mobile Terminal is a Listed Mobile Terminal.
- (c) Customer must:
 - (i) arrange for the supply and installation of each Mobile Terminal;
 - (ii) obtain accreditation of each Mobile Terminal type in accordance with the [Operations Manual](#);
 - (iii) ensure that each Mobile Terminal meets and continues to comply with the specifications set out in the [Product Technical Specification](#);
 - (iv) arrange for each Mobile Terminal to be listed as a Listed Mobile Terminal in accordance with the [Operations Manual](#); and
 - (v) ensure that each Mobile Terminal is installed and operated in accordance with the law and any lawful and binding direction or rule issued by a Regulator or Government Agency.

7. Interconnection and network supply chain

7.1 Interconnection and network supply chain

- (a) The diagram below depicts an example of the **nbn**[®] Satellite Mobility Product as one part of the overall network supply chain:

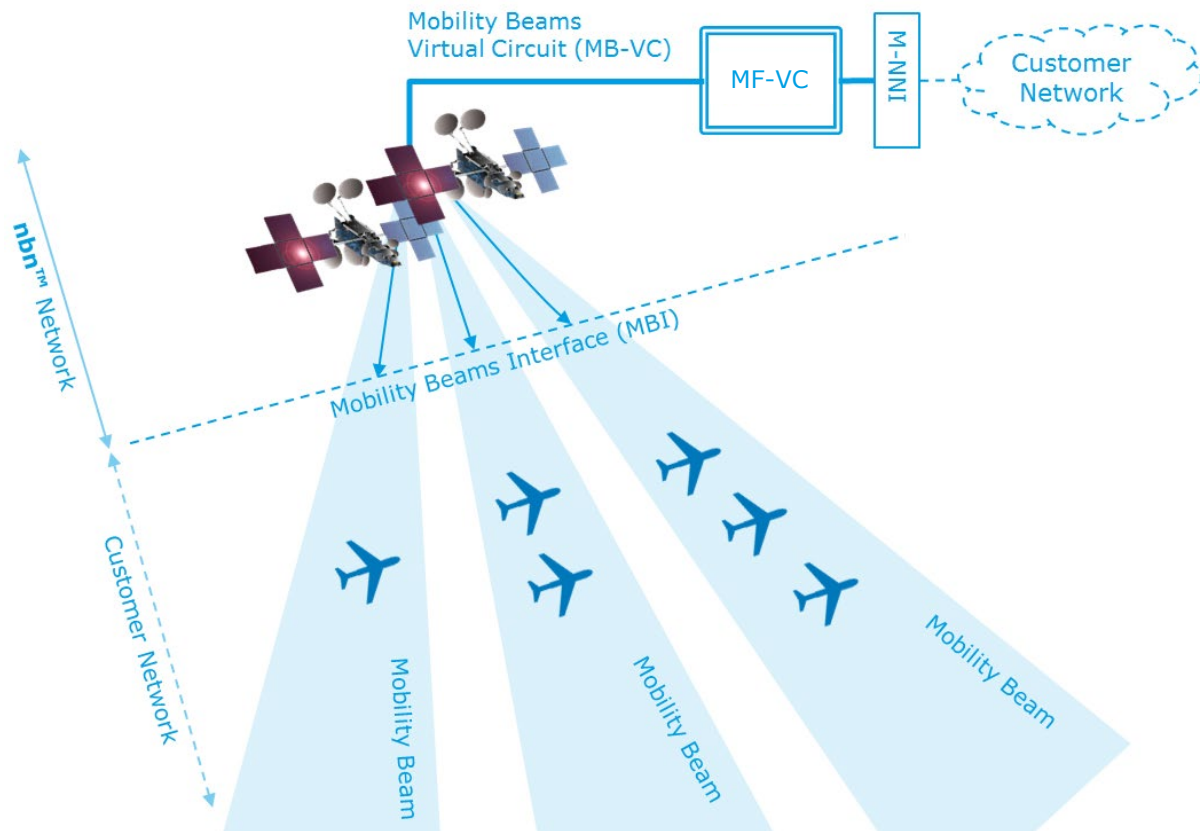

- (b) Customer is responsible for:
- (i) ordering sufficient capacity on each MF-VC to meet its own capacity requirements in respect of the supply of Customer Products to its Downstream Service Providers and Contracted End Users; and
 - (ii) separately acquiring, operating and maintaining all connections made to the Customer-side of the M-NNI.

7.2 nbn[®] Satellite Mobility Product Exclusions

The nbn[®] Satellite Mobility Product does not include:

- (a) facilities access at the location of the POI;
- (b) any backhaul transmission, cross connections or cabling from the Customer-side of the M-NNI;
- (c) any content or applications, including IP transit, Internet gateway connection, any other Customer equipment, BGP routing, soft switching infrastructure and all international connectivity associated with the supply of the nbn[®] Satellite Mobility Product;
- (d) Customer Equipment and End User Equipment (including Mobile Terminals);
- (e) access to layer 1 satellite capacity;
- (f) guaranteed satellite bandwidth;
- (g) any other end user equipment, such as modems, personal computers or network attached storage solutions; or

- (h) any network fault or performance monitoring probe or device supplied by **nbn** in relation to the **nbn**[®] Satellite Network.

*Section 8 describes the structure of the **nbn**[®] Satellite Network and the boundaries of the **nbn**[®] Satellite Mobility Product.*

8. Satellite Network architecture and the Satellite Mobility Product boundaries

8.1 Satellite Network architecture

- (a) In the Satellite Network:
 - (i) each Listed Mobile Terminal in respect of which the **nbn**[®] Satellite Mobility Product is available must be located within the Coverage Area of a Mobility Beam;
 - (ii) all Mobility Beams are located within a single Connectivity Serving Area (CSA);
 - (iii) the CSA is served by one Satellite POI; and
 - (iv) the Satellite POI may serve one or more CSAs.

8.2 Satellite Mobility Product boundaries

nbn[®] Satellite Mobility Product carries traffic over the **nbn**[®] Satellite Network between the following boundaries:

- (a) the Customer's side of the M-NNI; and
- (b) the MBI.

*Section 9 describes how **nbn** will de-prioritise traffic **nbn**[®] Satellite Mobility Product traffic.*

9. Satellite Mobility Product - Satellite Network Dimensioning

9.1 Satellite Mobility Product Performance Characteristics

The data throughput to or from the MBI and the speeds and performance of the **nbn**[®] Satellite Mobility Product experienced by Customer, Downstream Service Providers, Contracted End Users and other End Users will vary depending on factors within the Satellite Network.

The **nbn**[®] Satellite Mobility Product is designed for applications that can tolerate variable throughput and latency.

9.2 Priority given to **nbn**[®] Ethernet

- (a) The **nbn**[®] Satellite Mobility Product operates in a shared bandwidth pool with **nbn**[®] Ethernet (Satellite) and **nbn**[®] Sky Muster[®] Plus.
- (b) The actual data throughput at the MBI will, in respect of each Mobility Beam in which a Mobile Terminal is located, be adversely affected by **nbn**[®] Ethernet (Satellite) and **nbn**[®] Sky Muster[®] Plus traffic.
- (c) In circumstances of capacity contention or congestion of this kind, **nbn** will prioritise **nbn**[®] Ethernet (Satellite) and **nbn**[®] Sky Muster[®] Plus traffic over the **nbn**[®] Satellite Mobility Product by allocating bandwidth on the Satellite Network in accordance with Weighted Fair Queuing.

9.3 Contention or Congestion between MTs

- (a) The Customer's **nbn**[®] Satellite Mobility Product also operates in a shared bandwidth pool with **nbn**[®] Satellite Mobility Products supplied to Other Customers.
- (b) The actual data throughput of an MB-VC available at the MBI will therefore be adversely affected by the number of, and capacity utilisation by, Mobile Terminals (including Mobile Terminals installed by Other Customers or their Downstream Customers) located within the same Mobility Beam.

*Section 10 describes the speeds, performance and availability of the **nbn**[®] Satellite Mobility Product via the Satellite Network.*

10. Speeds, performance and availability

10.1 Speeds and performance of Ordered Products

- (a) References to download and upload speeds (CIR) only apply to the MF-VC in this Product Description and are references to the maximum data throughput that the Satellite Network is designed to make available for supply of the **nbn**[®] Satellite Mobility Product to Customer at the M-NNI only. As described in Section 9, the actual data throughput of an MB-VC available at the MBI will be adversely affected by other Satellite Network traffic on the Mobility Beam in which the relevant Mobile Terminal is located and may be significantly less than the corresponding MF-VC CIR.
- (b) The access to and use of the **nbn**[®] Satellite Mobility Product will not be continuous or free of faults and may be affected by Satellite Limitations.
- (c) The speeds and performance (including stability) of Ordered Products actually experienced by Customer, Downstream Service Providers, Contracted End Users and other End Users will vary and depend upon a number of factors pertaining to the Customer Network including:
 - (i) the equipment that is used by Customer, Downstream Service Providers, Contracted End Users and other End Users (including the throughput limit of the Mobile Terminal);
 - (ii) interference caused by the equipment or network of any third party; and
 - (iii) the nature, quality and length of the connection to the relevant Mobile Terminal including signal reception, the position and/or orientation of the Supported Commercial Passenger Aircraft, line-of-sight interference, Satellite Limitations or prevailing radio conditions at or affecting the relevant Mobile Terminal.

10.2 Availability of supply of product

- (a) The supply of the **nbn**[®] Satellite Mobility Product by **nbn** to Customer is subject to the availability of each of the Product Components and Product Features at the time at which Customer places an order.